PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : F21K 7/00, F21L 7/00 — A1

(11) International Publication Number: WO 99/09347

(43) International Publication Date: 25 February 1999 (25.02.99)

(21) International Application Number: PCT/US98/16989

(22) International Filing Date: 13 August 1998 (13.08.98)

(30) Priority Data:
08/918,514 21 August 1997 (21.08.97) US

(71)(72) Applicant and Inventor: KRIETZMAN, Mark [US/US]; 1508 Granvia Altamira, Palos Verdes Estates, CA 90274 (US).

(81) Designated States: AU, CA, JP, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: LASER LIGHT

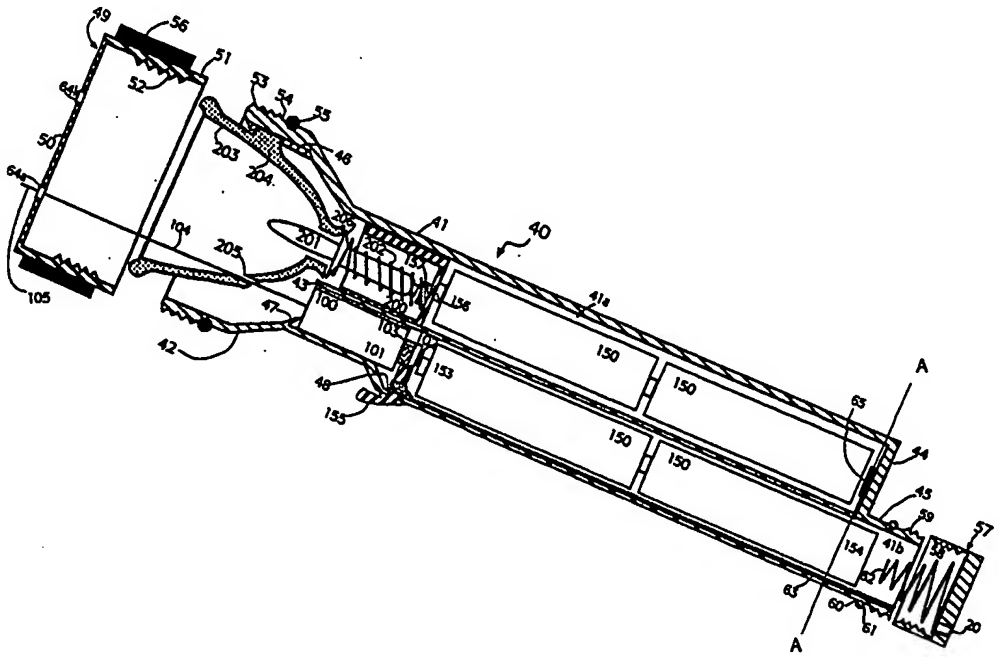

(57) Abstract

A novel hand–held laser illumination device (10) which provides for prolonged precise controlled illumination. The present invention also provides for a combination generalized illumination and selectable precise laser outputs and submersible applications.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

LASER LIGHT

BACKGROUND OF THE INVENTION

Field Of The Invention:

This invention relates to hand held lighting devices, and more particularly to a novel hand held submersible laser illuminator and communication, targeting, presentations, and measurement.

Those experienced with diving will recall that inexpensive underwater communication is normally a combination of writing tablets, hand signals and nods. Watertight flashlights may solve some problems but do not provide the precise highly visible illumination and communication a submersible laser emitting illuminator yields.

A submersible laser illuminator is visible in day and night situations and enhances a divers ability to communicate. Providing selectable laser outputs further enhances clear communication and illumination.

In both diving and non-diving situations a flashlight which produces both a general area of illumination and a precise controlled laser illumination would be useful.

The present invention provides a novel illumination system for prolonged precise selectable laser communication and precise controlled laser illumination. The present invention also provides for a combination generalized illumination and precise laser illumination.

Disclosure Of The Invention

Accordingly, it is an object of the invention to provide a novel hand held laser illuminator.

It is yet another object of the invention to provide a novel hand held submersible laser illuminator.

It is yet another object of the invention to provide a novel hand held submersible laser illuminator which can transmit a narrow focused output, underwater, to activate a remote wavelength specific submersible photoactive sensor with audible output.

It is yet another object of the invention to provide a novel hand held submersible laser illuminator with selectable diffuse output.

It is yet another object of the invention to provide a novel hand held submersible laser illuminatort with selectable pattern output.

It is yet another object of the invention to provide a novel hand held submersible flashlight and laser illuminator.

It is yet another object of the invention to provide a novel hand held flashlight and laser illuminator.

It is yet another object of the invention to provide a novel hand held submersible flashlight and laser illuminator with selectable diffuse laser output.

It is yet another object of the invention to provide a novel hand held submersible flashlight and laser illuminator with selectable pattern laser output.

The above and other embodiments of the present invention are achieved, according to a preferred embodimen thereof, by providing a novel comvbination of a laser emitting source with a submersible casing. optical laser otuput altering elements may be added to further present the invertion. The combination of the Laser emitting source, optical laser otuput altering elements and a secondary illumiantion source with two seperate power supplies further achieve the invention.

Brief Description Of The Drawings

The above adn other embodiments of the present invention may be more fully understood from the following detailed description, taken together with the accompanying drawings, wherein similar refrence characters refer to similar elements throughout, and in which:

Figure 1A illustrates a cut-away side assembly view of a preferred embodiment of the invention.

Figure 1B illustrates a cut-away side view of the preferred embodiment of the present invention.

Figure 2A illustrates a partial, cut-away side assembly view of an alternate embodiment of the present invention.

Figure 2B illustrates a partial, top view of the embodiment of FIG. 2A assembled.

Figure 2C illustrates a front view of the embodiment of FIG. 2B.

Figure 2D illustrates a front view of the selectable output of FIG. 2C.

Figure 3A illustrates a partial, cut-away side assembly view of another preferred embodiment of the present invention.

Figure 3B illustrates a cut-away rear view of the embodiment of FIG. 3A, at line A -A.

Figure 3C illustrates a front view of the embodiment of FIG. 3A.

MODES FOR CARRYING OUT THE INVENTION

Referring now to the drawings, there is illustrated in FIG. 1A a cut-away

assembly side view of the preferred embodiment of the laser light generally designated **10**.

The generally tubular housing **11** is of a size and shape which allows the insertion of one or more a batteries **150**, a solid state laser diode **100**, (held in place within a circular diode guide **12** formed within the housing), and a front spacing spring **151** for controlling battery **150** contact with the laser emitting diode **100**.

The batteries **150** are inserted into the rear of the housing **13**. The outer wall of the rear of the housing **13** is circularly groved **14** to secure a rubber or silicone O-ring **15** firmly in place and has circular coarse threads **16**. An end cap **17** with internal threads **18** corresponding to the course threads **16** is screwed on to the housing **13** over the O-ring **15** to seal the device **10**. The rear-cap **17** also contains a contact spring **19** for controlling battery **150** contact with the laser emitting diode **100** and a one-way pressure relief valve **20** to vent battery **150** gases.

At the front end of the housing **21**, the diode guide **12** is internally threaded **22**. The diode guide **12** abuts a diode stop **23** which is used to inhibit rearward movement of the laser emitting diode **100**.

The laser emitting diode **100** is readily available and is known art. The diode comprises a laser beam module with a control circuit. Since the laser emitting diode is well known in the art, it is unnecessary to present a detailed statement of its construction in the present invention.

For the preferred embodiment a laser emitting source in the visible range is used. The most compact source is a solid-state diode in the 532 - 690 nm range. Diode-pumped, CW diode, Q-switched diode, solid-state, solid-state CW, solid-state Q-switched, gas, dye, ion, or rare-earth element laser emitting sources may be used in

place of the solid state diode when appropriate for the intended usage. For surveillance uses, search and rescue or other applications which use night vision or machine vision coupled with a non-visible spectrum illumination a laser emitting diode in the x-ray, ultraviolet or infrared spectrum may be substituted for the visible spectrum laser emitting diode.

Extending from the rear **101** of the laser emitting is a first conductive contact **102** and a second conductive contact **103**. Within the housing **11** a rear contact strip **152** of a conductive material is affixed axially within the device.

To seal the diode **100** within the housing **11** and allow the light emitted therefrom to exit the housing **11** a transparent lens cap **24** is provided. The transparent lens cap **24** is finely threaded **25** to match the threads **22** provided within the diode guide **12** and is also circularly groved (not shown) to secure a front O-ring **26**. When screwed into the diode guide **12** the transparent lens cap **24** and O-ring **26** form a watertight seal.

Referring now FIG. 1B, there is illustrated a cut-away side view of the assembled preferred embodiment of the laser light generally designated **10**.

The assembled device **10** is shown in the on position. The laser emitting diodes second contact **103** is firmly against the front battery terminal **153**. The rear battery terminal **154** is in contact with the rear contact spring which connects to the rear contact strip which is in contact with the laser emitting diodes first contact **102** thereby completing the circuit which provides current to the diode which produces the laser output **104**. The laser output **104** exits the device **10** via the transparent lens **24**. To stop the flow of current to the laser emitting diode **100** the end cap **17** may be rotated counterclockwise which causes it to unscrew along the line of arrow **300** and release

the compression on the front spacing spring **151** thereby breaking the contact between the front battery terminal **153** and the laser emitting diodes first contact **102**.

Referring now FIG. 2A, there is illustrated a cut-away partial side assembly view of an alternate embodiment of the laser light generally designated **30**. The device **30** is constructed around the tubular housing **11** of the preferred embodiment. Formed as part of the housing **11** are a plurality of overlens guides **31** and a momentary switch guide **32**.

The interchangeable overlens assembly **33** rotatably snaps over the overlens guides **31** and encases the front of the laser light **21**. A plurality of perpendicular legs **34** extending around the circumference of the overlens face **35** are of a size and shape which removably and rotatably snap over the overlens guides **31**. The overlens face **35** is constructed of a material which allows the passage and shaping of the laser output **104**. Within the face of the overlens **35** are a series of discreet lens elements **35a** & **35c**. The discreet elements are positioned in-line with the laser output **104** which, passes from the diode 100 through the transparent lens **24**. Not shown is the complete simple electrical circuit supplying current to the diode which is known art.

The wavelength specific laser output **104** may be diffused or formed into a wide variety and type of shapes and patterns specific to the characteristics of the discreet elements, partially shown, **35a** & **35c**. The exact degree of pattern forming or diffusion of the output is dependent on the intended use.

Material choice for the discreet elements **35a** & **35c** include convex lenses, concave lenses, conical lenses, magnifying lenses, condensing lenses, Fresnel lenses, diffusion lenses, interference pattern generating gratings, cross-hair generator lens, straight line generator lenses, pattern generator lenses, diffractive pattern generators,

holographic diffusers, optical diffusion glass, optical diffusion plastic, diffusion filters, circular diffusers, elliptical diffusers, off-axis lenses, off-axis holographic filters, or off-axis holographic diffusers all yield controllable and selectable results.

For the present device **30** a series of diffusion elements and pattern generating gratings form the parts of the overlens face **35**. To cause the laser output **104** to pass through a selected discreet element the overlens **35** may be rotated around the overlens guides **31** in line with the laser output **104**.

Within the roughly cylindrical housing **11** a solid state laser emitting diode **100** is affixed. Current from the batteries **150** is supplied to the laser emitting diode **100** via the diodes first **102** and second **103** conductive contacts. The front terminal of the battery **153** is in contact with the diodes first contact **102**. A rotating momentary switch **155** is sealed within the switch guide **32** which traverses from the exterior to the interior of the device **30**. Not shown is the rear of the device **30** and the rear terminal of the battery, the end cap, or the contact spring. The rear terminal of the batteries (not shown) is attached to the rotating momentary switch **155** via a conductive strip **156** which contacts the conductive member **157** of the rotating momentary switch **155**. The conductive member can be rotated into contact with the diodes second contact **103** to complete a circuit. It is envisioned that other types of switches, momentary switches, spring loaded switches and locking switches well known in the art may be used.

Referring now FIG. 2B, there is illustrated an assembled partial top view of the embodiment of FIG. 2A, generally designated **30**. The assembled device **30** is shown in the on position. The rotating momentary switch **155** is activated by pressure applied at the finger grip **158** along the line of arrow **301**, the flexible spring end **159**

is secured within the switch guide **32** and distorts in a reciprocal response to the pressure being applied. Not shown is the rotation of the conductive member **156** within the device **30** and the connection with the diodes second contact. When the pressure is released the flexible spring end **159** will undistorted and the rotating momentary switch **155** will return to the off position.

The enhanced laser output **105** is shown after its passage from the laser emitting diode **100** through a selected discreet element of the overlens **35b**. To increase ease of rotation of the overlens for selecting a discreet element **35** ribs **36** may be extended from outer wall of one or more of the perpendicular legs **34** .

Referring now FIG. 2C, there is illustrated a front view of the embodiment of FIG. 2B generally designated **30**.

The face **35** of the overlens **33** is divided into a plurality of discreet elements **35a-d** and each element has distinct diffusion and pattern generating characteristics. The ribs **36** positioned around the overlens **33** provide for ease of griping and rotation.

Referring now FIG. 2D, a front view of the selectable output of FIG. 2C, generally designated **105**.

The small output **105a** is a diffuse spot with a fan angle of between 0.1 and 1 degree. The large output **105b** is a diffuse spot with a fan angle of between 1.01 and 5 degrees. The hoop output **105c** is with a non-illuminated center results from passing the laser output **104** through a pattern generating grating. The cross hair output **105d** also results from passing the laser output **104** through a pattern generating grating. The patterns shown are for illustration purposes only and are not intended to be a limitation on the possible patterns and pattern combinations which may be generated by the device **30**.

Referring now FIG. 3A, there is illustrated a cut-away side assembly view of the preferred embodiment of a laser flashlight generally designated **40**.

The device **40** is constructed around the generally tubular housing **41**, with an enlarged front **42** and an internal axial center divider **43**, which divides the housing **41** into an upper chamber **41a** and a lower chamber **41b**. The upper chamber has a sealed rear end **44** and the lower chamber has an open rear end **45**. Both upper and lower chambers merge into the enlarged front **42**.

The upper chamber **41a** contains the flashlight components, electrical circuit and batteries. The lower chamber **41b** contains the laser components, electrical circuit and batteries.

The laser emitting diode **100** is readily available and is known art. The diode comprises a laser beam module with a control circuit. Since the laser emitting diode is well known in the art, it is unnecessary to present a detailed statement of its construction in the present invention.

For the preferred embodiment a laser emitting source in the visible range is used. The most compact source is a solid-state diode in the 532 - 690 nm range. Diode-pumped, CW diode, Q-switched diode, solid-state, solid-state CW, solid-state Q-switched, gas, dye, ion, or rare-earth element laser emitting sources may be used in place of the solid state diode when appropriate for the intended usage. For surveillance uses, search and rescue or other applications which use night vision or machine vision coupled with a non-visible spectrum illumination a laser emitting diode in the x-ray, ultraviolet or infrared spectrum may be substituted for the visible spectrum laser emitting diode.

For the light component construction of the laser flashlight a plurality of batteries **150**, a light bulb guide **200**, a light bulb **201**, a spacer spring **202**, and a reflector dish **203** are removably inserted the upper chamber **41a** through the enlarged front **42**. Formed as part of the reflector dish **203** is a stabilizer **204** which corresponds to the stabilizer guide slot **46** formed axially in the interior surface of the wall forming the enlarged front **42**. The combination stabilizer **204** and stabilizer guide slot **46** restrict entry of the reflector dish **203** to one orientation and prevent rotation.

For the laser component construction of the laser flashlight, a laser emitting diode **100** is also mounted in the housing **41** through the enlarged front **42**. The rear of the laser diode **101** is affixed into the lower chamber **41b** via a flexible one-way locking tab **47** which extends perpendicular from the inner wall of the lower chamber **41b** adjacent to the enlarged front **42**. The one-way locking tab **47** will flex and distort to allow passage of the diode **100** into the lower chamber **41b**. Once fully inserted the locking tab **47** will spring back and prevent the diode **100** from sliding forward.

To inhibit rearward movement of the laser emitting diode **100** a rotating momentary switch **155** is inserted and sealed within the switch guide **48** through the outer wall of the lower chamber **41b** and behind the rear **101** of the laser emitting diode. The rotating momentary switch **155** is of a size and shape to both make positive contact with the diodes first and second set of conductive contacts **102** & **103** and restrict rearward movement of the diode.

A watertight and removable lens cover **49** is removably mounted over the enlarged front **42** of the housing **41** to seal the upper chamber and components. The lens cover **49** is cup shaped with a transparent planar face **50** and a annular circular

wall **51** extends towards the enlarged front **42**. The lens cover **49** is internally threaded with lens cover threads **52** corresponding to the externally threaded **53** enlarged front **42**.

To create the watertight seal a large O-ring groove **54** is formed on the external surface of the enlarged front **42** and a large rubber or silicone O-ring **55** is affixed snugly within the large O-ring groove **54**. The lens cover **49** is attached to the enlarge front **42** by screwing it on. To simplify rotation and prevent slippage of a hand on the lens cover **49** a plurality of raised ribs **56** are formed around the outer surface of the annular circular wall **51**.

One or more batteries **150** supplying current to the laser emitting diode **100** are inserted through the open rear end **45** of the lower chamber **41b**. The lower chamber is sealed by the lower chamber end cap **57** which has internal end cap threads **58** corresponding to the external housing threads **59** formed around the rear end **45** of the lower chamber **41b**.

Also formed within the end cap **57** is a one-way pressure valve **20** which allows any gases generated by the batteries or diode to escape while preventing intrusion of water. A watertight seal is formed between the outer surface of the rear end **45** of the lower chamber **41b** and the end cap **47** via a small O-ring groove **60** containing a small rubber or silicone O-ring **61**. The lower chamber end cap **57** is attached by rotating it in a clockwise fashion over the rear end **45** of the lower chamber **41b**.

The circuit supplying current to the diode is formed by screwing on the lower chamber end cap **57** which in-turn causes the conductive diode power spring **62** to contact with and urge the battery forward creating a positive contact between the diodes first contact **102** and the battery front terminal **153**. To complete the circuit the

conductive diode power strip **63** connects the rear battery terminal **154** with the rotating momentary switch **155**.

The laser diode **100** may be activated independently or in concert with the light bulb **201**. When active, the laser output **104** passes from behind the reflector dish **203** through a laser beam guide **205**, of a size an orientation to allow unrestricted passage of the laser output **10**, then through the transparent planar face **50** of the lens cover **49**. To generate an enhanced the laser output **105**, formed as part of, or affixed to, the transparent planar face **50** are a plurality of discreet elements **64a** & **64k**. The discreet elements **64a** & **64k** are oriented in the planar face **50** so that they may be rotated in-line with the laser output **104**.

The laser output **104** may be diffused and formed into a wide variety and type of shapes and patterns specific to the characteristics of the discreet elements **64a** & **64k** The exact degree of pattern forming or diffusion of the output is dependent on the intended use. For the present device **40** a series of plastic diffusion elements and interference pattern generating gratings form the discreet elements **64a** & **64k**.

Material choice for the discreet elements **64a** & **64k** include convex lenses, concave lenses, conical lenses, magnifying lenses, condensing lenses, Fresnel lenses, diffusion lenses, interference pattern generating gratings, cross-hair generator lens, straight line generator lenses, pattern generator lenses, diffractive pattern generators, holographic diffusers, optical diffusion glass, optical diffusion plastic, diffusion filters, circular diffusers, elliptical diffusers, off-axis lenses, off-axis holographic filters, or off-axis holographic diffusers all yield controllable and selectable results.

The light bulb **201** in this embodiment is Xenon or Halogen gas filled, however, it is envisioned that other types of light sources all well known in the art may

be used. In this embodiment four batteries placed parallel in rows of two are connected in series. A rear contact strip **65** affixed at the rear end of the upper chamber **41a**. The flashlight battery positive terminal **156** and the negative terminal (not shown) abut the light bulb guide contacts **157**. The simple pressure circuit is known art and is completed by urging the light bulb back within the light bulb guide **200** until it contacts with the positive and negative terminals. A spacer spring **202** surrounds the light bulb **201** and is compressed by the action of tightening the lens cover **49** onto the housing **41** which pushes the reflector dish **203** against the light bulb.

Referring now FIG. 3B, there is illustrated a rear cut away, along line A- -A, view of the embodiment of FIG. 3A, generally designated **40**.

Within the upper chamber **41a** are the two ends **150a** & **150b** of the two rows of batteries powering the flashlight are connected at the rear via the rear contact strip **65**.

The plurality of raised ribs **56** are evenly spaced around the outer surface of the annular circular wall **51** to enhance ease of rotation of the lens cover **49**.

Referring now FIG. 2C, there is illustrated a front view of the embodiment of FIG. 3A generally designated **40**.

Formed within the planar face **50** are a plurality of discreet elements **64a** & **64k**. Between each discreet element **64a** & **64k** is the transparent planar face **50** material which allows the un-enhance laser output **104** to pass from the device. When used in concert, the light bulb **201** produces a generalized wide spectrum illumination and the laser output, exiting the housing through the laser beam guide **205**, produces the precise shaped pattern or pin-point illumination within the area of generalized illumination.

Since certain changes may be made in the above apparatus without departing from the scope of the invention herein involved, it is intended that all matter contained in the above description, as shown in the accompanying drawing, shall be interpreted in an illustrative, and not a limiting sense.

5

WHAT IS CLAIMED IS:

1. A hand held submersible laser light, adapted for underwater use, comprising:

(a) a hollow elongated casing having an open front and rear end and being circular in cross-section with a outwardly protruding cylindrical neck forming a clear cover receiving front end and a cylindrical end cap receiving back end;

(b) a laser emitting source, with drive circuitry and positive and negative electrical terminals, of a size and shape to fit within said hollow elongated casing;

(c) a substantially collimated laser illumination emitted by said laser emitting source;

(d) a clear cover which mates with said clear cover receiving front end;

(e) a end cap which mates with said end cap receiving back end;

(f) a sealant means disposed between said clear cover receiving front end and said clear cover and between said end cap receiving back end and said end cap for providing a watertight seal between said clear cover receiving front end and said clear cover and between said end cap receiving back end and said end cap;

(g) a series of one or more batteries inserted into said hollow elongated body; and,

(h) a connection means for electrically connecting said laser emitting source to said batteries.

2. The laser light according to claim 1, wherein said outwardly protruding cylindrical neck includes internal threads formed adjacent to said open front end and said clear cover has externally formed mating threads for mating with said neck threads.

3. The laser light according to claim 1, wherein said back end includes external threads formed adjacent to said open back end and said end cap has internally formed mating threads for mating with said back end threads.

4. The laser light according to claim 1, wherein said sealant means comprises one or more silicone or rubber O-rings.

5. The laser light according to claim 1, wherein said connection means comprises:

(a) a manually operable means for telescopically moving said batteries along a longitudinal axis of said hollow casing; and,

(b) a contact means responsive to the position of said batteries for selectively electrically coupling said laser emitting source negative and positive electrical terminals to said batteries within said casing.

6. The laser light according to claim 5, wherein said contact means is a conductive spring is affixed to the internal wall of said end cap and is attached to a axial conductive strip electrically connected to said diodes negative terminal and said manually operable means for telescopically moving said batteries for electrically coupling to said laser emitting sources negative and positive terminals is the clockwise rotation of said

end cap on said open back end.

7. The laser light according to claim 1, wherein said connection means comprises:

(a) a momentary pressure switch mounted through said casing with a depressible external head actuated via depressing said external head; and,

(b) an internal contact responsive to the position of said external head.

8. The laser light according to claim 1, further comprising a one-way watertight venting valve for gas elimination.

9. The laser light according to claim 1, further comprising a replaceable hydrogen catalyst for gas elimination.

10. The laser light according to claim 1, wherein said laser emitting source is solid-state diode.

11. A hand held submersible laser light, adapted for underwater use, comprising:

(a) a hollow elongated casing having an open front and rear end and being substantially circular in cross-section with a outwardly protruding cylindrical neck forming a clear cover receiving front end and a cylindrical end cap receiving back end;

(b) one or more laser emitting sources with drive circuitry and

positive and negative electrical terminals;

(c) a laser source positioning guide formed within said hollow elongated casing to affix said laser emitting source within said hollow elongated casing in a fixed orientation.

(d) a substantially collimated laser illumination emitted by each of said laser emitting sources;

(e) a clear cover which mates with said clear cover receiving front end;

(f) a overlens housing with a transparent front of a size and shape to cover said clear face;

(g) a plurality of flexible perpendicular legs, extending in one direction, around said overlens of a size and shape to fit snugly over said front end of said hollow casing yet allow for rotation and removal of said overlens;

(h) a gripping surface of ribs formed around the circumference of said overlens housing;

(i) a optical means formed within said overlens for altering said collimated laser illumination;

(j) a end cap which mates with said end cap receiving back end;

(k) a sealant means disposed between said clear cover receiving front end and said clear cover and between said end cap receiving back end and said end cap for providing a watertight seal between said clear cover receiving front end and said clear cover and between said end cap receiving back end and said end cap;

(l) a series of one or more batteries inserted into said hollow elongated body; and,

(m) a connection means for electrically connecting said laser emitting source to said batteries.

12. The laser light according to claim 11, wherein said optical means is a diffusion lens.

13. The laser light according to claim 11, wherein said optical means is a interference pattern generating grating.

14. The laser light according to claim 11, further comprising:

(a) a plurality of overlens rotation catches formed on the exterior of the front end surface of said hollow elongated casing; and,

(b) a plurality of overlens rotation latches formed on said flexible perpendicular leg which mate with said overlens rotation catches whereby said overlens is affixed to said elongated casing.

15. A hand held laser flashlight, comprising:

(a) a hollow elongated casing having an open front and a partially sealed rear and being substantially oval in cross-section with an internal wall bisecting a portion of the casing axially into upper and lower internal chambers which connect internally at the outwardly protruding enlarged cylindrical neck forming a front cover receiving head, said upper chamber having a sealed back end and said lower chamber having an open back end with a protruding cylindrical end cap receiving rear end, a diode receiving front end of said lower chamber, said upper and lower chambers are

each of a size and shape for receiving one or more batteries;

(b) a illumination means mounted within said upper chamber for receiving electrical power from said batteries and for generating light;

(c) one or more laser emitting sources with a drive circuit and positive and negative electrical terminals of a size and shape to fit within said lower chamber;

(d) a substantially collimated laser illumination emitted by said laser emitting source;

(e) a wide spectrum light emitted by said illumination means;

(f) a transparent front cover which mates with said front cover receiving head through which said laser illumination and said wide spectrum light pass;

(g) a end cap which mates with said end cap receiving rear end; and,

(h) a connection means for electrically connecting said illumination means and said laser emitting source to said batteries.

16. The laser flashlight according to claim 15, wherein said laser emitting source is a solid-state diode.

17 The laser flashlight according to claim 16, wherein said connection means for electrically connecting said illumination means and said laser emitting source to said batteries further comprises;

(a) two or more separate series of batteries;

(b) a first switch for electrically connecting said illumination means to one series of said batteries; and,

(c) a second switch for electrically connecting said laser emitting diode to another series of said batteries.

18. The laser flashlight according to claim 17, wherein said first and second switches are push button on/off.

19. The laser flashlight according to claim 17, wherein said illumination means comprises:

(a) a light bulb;

(b) a cylindrical reflecting dish having a substantially parabolic reflecting surface with a central light bulb guide mounted adjacent to said enlarged head within said neck facing said transparent front cover; and,

(c) a light bulb contact guide for mounting said light bulb with electrical contacts formed thereon to connect with said first switch, which is positioned through said light bulb guide in said reflecting dish which holds said light bulb in place.

20. The laser flashlight according to claim 19, further comprising:

(a) a laser output guide formed within said cylindrical reflecting dish for allowing said laser illumination to pass from behind said reflecting dish in-line and through said transparent front cover;

(b) one or more alignment channels formed axially along the interior surface of said enlarged head; and,

(c) one or more alignment guides formed on said reflecting dish, corresponding to said alignment channels, which restrict the rotational movement of

said reflecting dish and allow for linear forward and backward movement of said reflecting dish within said neck while maintaining alignment between said laser illumination and said laser output guide.

21. The laser flashlight according to claim 20, wherein said first switch is a manually operable means for telescopically moving and electrically coupling said light bulb along a longitudinal axis of said elongated casing and in contact with one series of said batteries.

22. The laser flashlight according to claim 21, wherein said manually operable telescoping means comprises:

(a) a plurality of external head threads formed adjacent to said front cover receiving head;

(b) a plurality of internal mating threads within said transparent front cover for mating with said external head threads;

(c) a latch formed on the reflecting dish adjacent to said bulb guide and a corresponding catch formed on said light bulbs conductive base whereby the mating of said transparent front cover causes said reflecting dish to be urged linearly within said neck and said latches urges said catches and said light bulb against said coil spring whereby said light bulb is electrically connected, via said linear movement, to said series of batteries; and,

(d) a gripping surface of large ribs formed around the circumference of said transparent front cover for ease of rotation of said transparent front cover.

23. The laser flashlight according to claim 22, further comprising a plurality of small discreet optical elements, each an optical means for altering said laser illumination, formed within or affixed to said transparent front cover and positioned whereby rotating said transparent front cover on said mating threads positions a selected one of said discreet optical elements in the path of said laser illumination.

24. The laser flashlight according to claim 20, further comprising:

(a) a plurality of overlens rotation guides formed on the exterior surface of said transparent front cover;

(b) a overlens housing with a transparent front of a size and shape to fit over said transparent front cover

(c) a plurality of flexible perpendicular legs, extending in one direction, around said overlens of a size and shape to fit snugly over said transparent front cover and said overlens rotation guides which allow the removal and rotation of said overlens housing;

(d) a gripping surface of ribs formed around the circumference of said overlens housing; and,

(e) a series of small discreet optical means formed within said overlens, in-line with said lase illumination, for altering said collimated laser illumination.

25 . A laser flashlight, according to claim 15, adapted for wet environment and underwater use further comprising:

(a) a silicone or rubber O-ring disposed between said front cover receiving head and said transparent front cover and a silicone or rubber O-ring disposed

between said end cap receiving rear end and said end cap whereby a watertight seal is formed between said clear cover receiving front end and said clear cover, and between said end cap receiving rear end and said end cap; and,

(b) a gas elimination means.

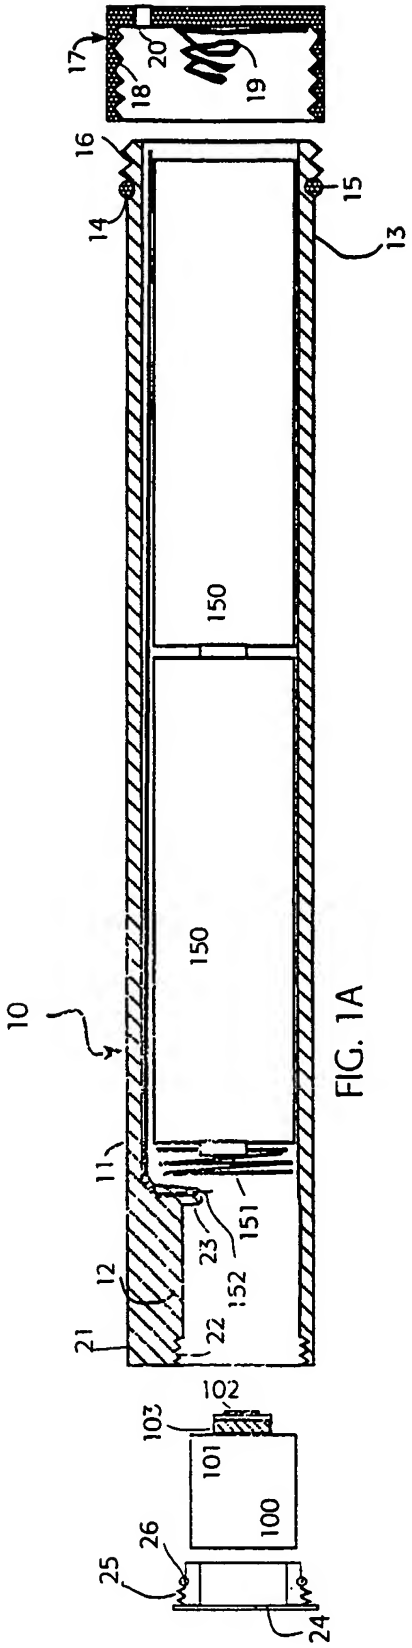
17
18
20
19
16
15
14
13
150
150
10
11
151
23
12
152
22
21
102
103
101
100
26
25
24

FIG. 1A

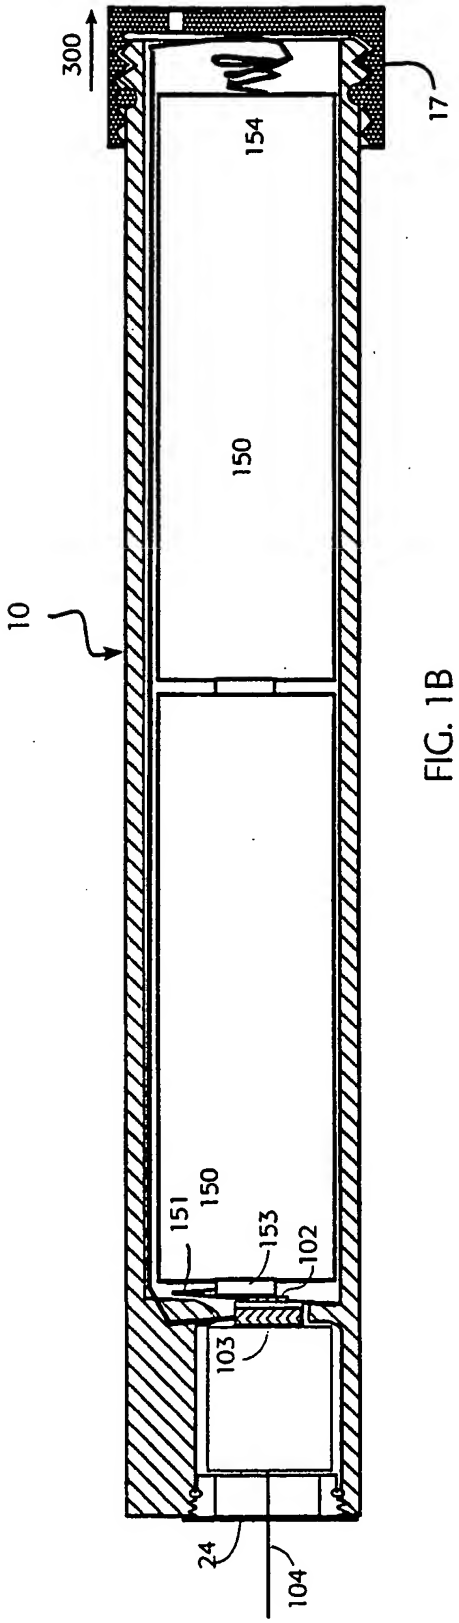
300
17
154
150
10
151
150
153
102
103
24
104

FIG. 1B

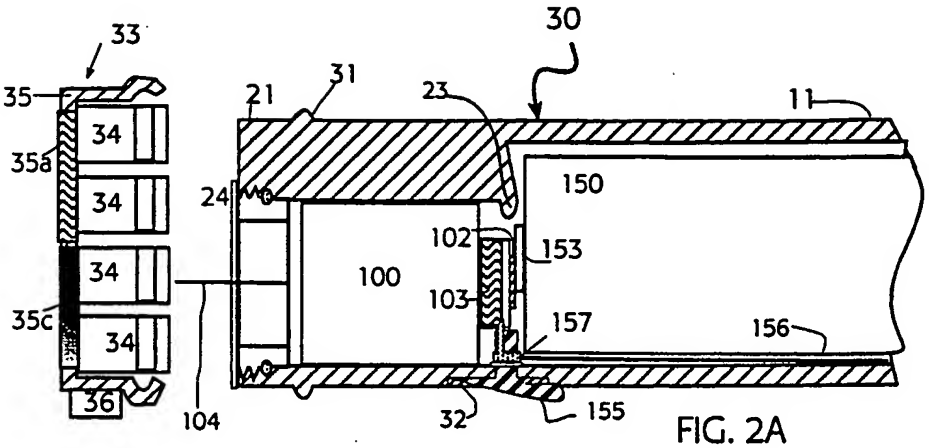

FIG. 2A

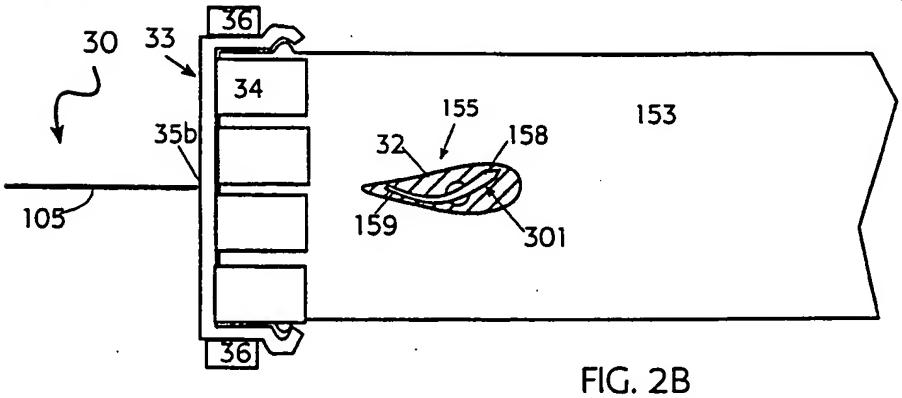

FIG. 2B

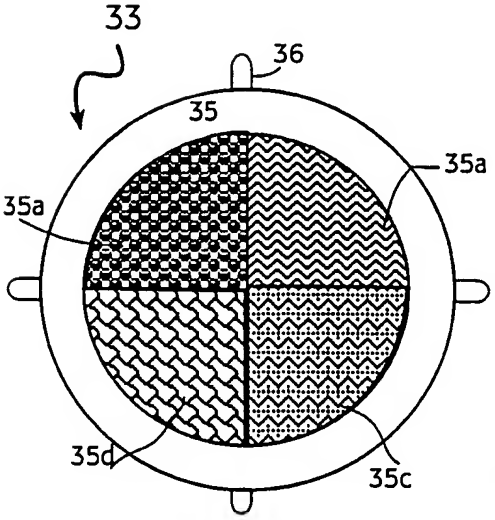

FIG. 2C

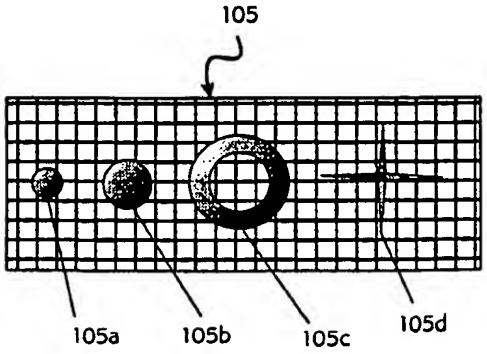

FIG. 2D

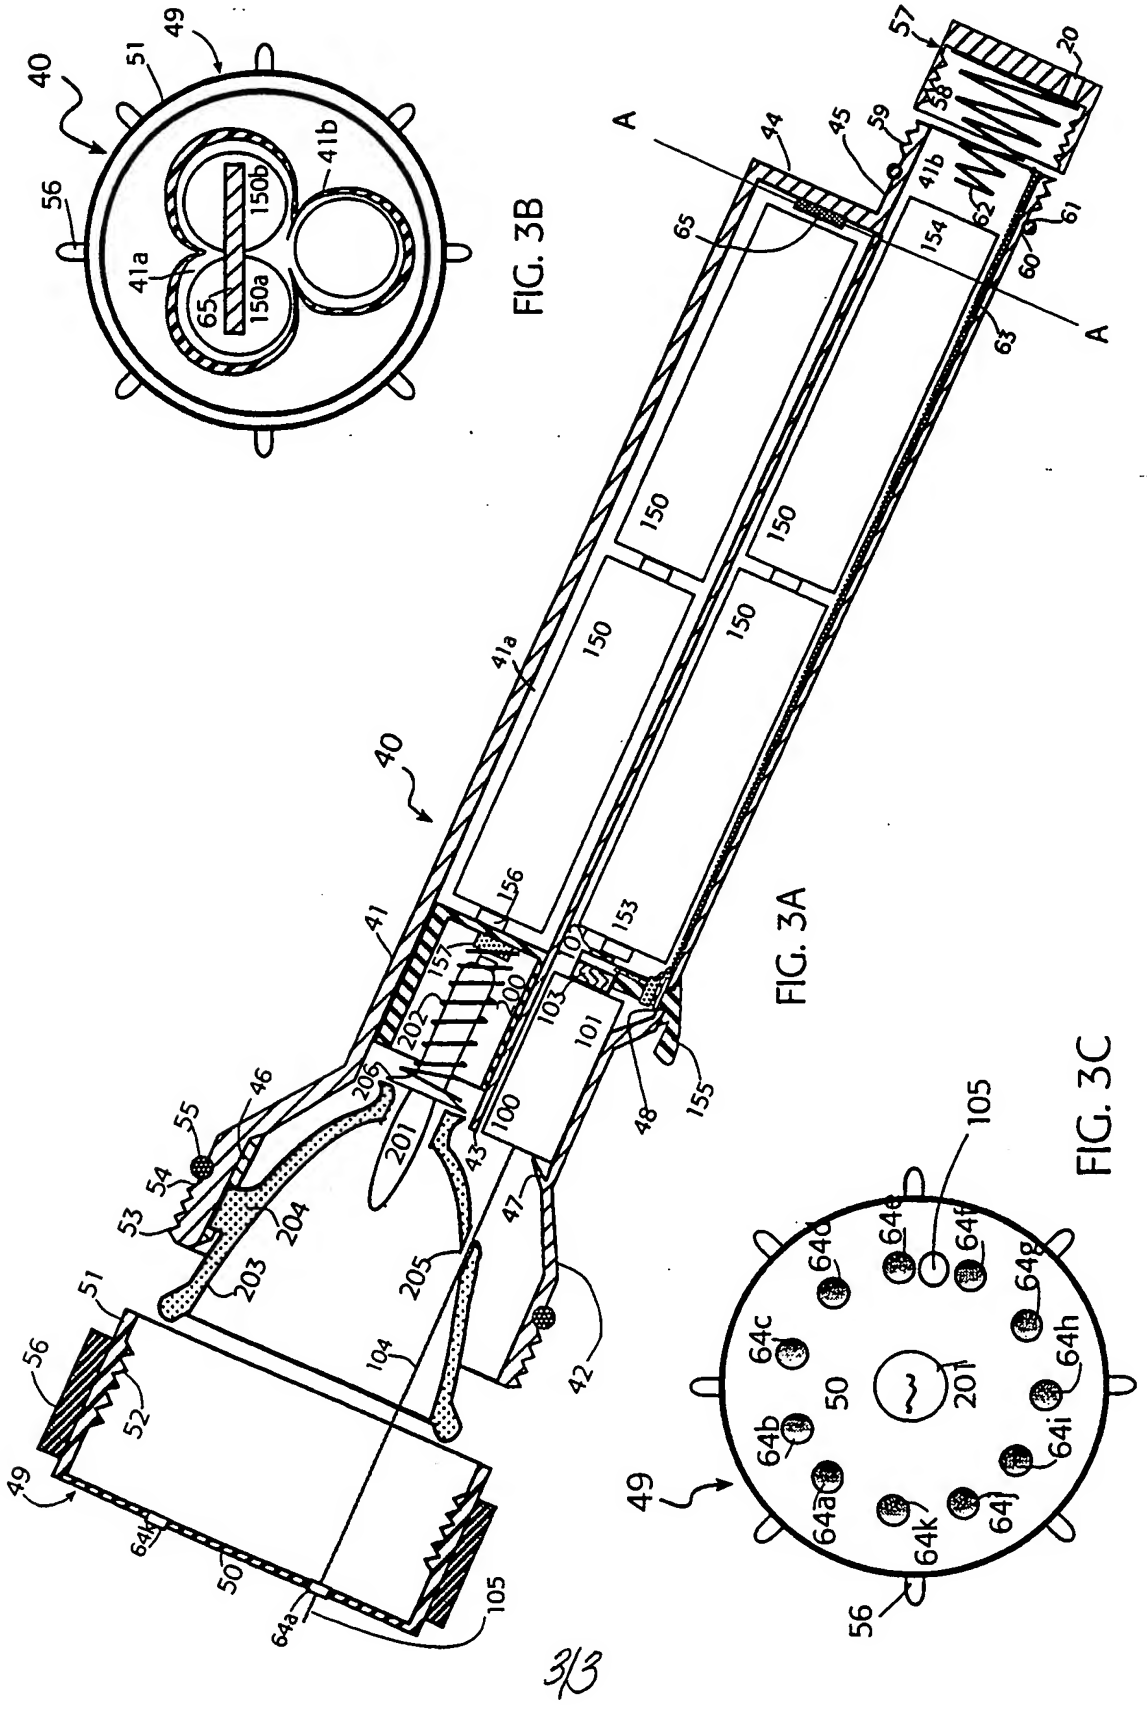
40
49
51
56
41b
150b
41a
65
150a
FIG. 3B
A
A
57
20
58
44
45
59
41b
62
61
60
63
65
154
150
150
150
150
41a
40
41
156
153
157
104
200
202
103
101
100
43
47
48
155
42
46
55
54
53
204
203
205
206
201
104
52
64k
50
105
64a
FIG. 3A
105
64d
64e
64f
64g
64c
64h
64b
50
201
64i
64a
64k
64j
49
56
FIG. 3C

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/16989

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :F21K 7/00; F21L 7/00
US CL :362/158, 184, 206, 259
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 362/158, 184, 203, 205, 206, 259

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y -- A	US 5,343,376 A (HUANG) 30 August 1994 (30/08/94), See entire document.	1-11 --- 12-29
Y --- A	US 5,349,506 A (MAGLICA) 20 September 1994 (20/09/94), See entire document.	1-11 --- 12-29

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E"	earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search 06 OCTOBER 1998	Date of mailing of the international search report 30 OCT 1998
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer THOMAS M. SEMBER Telephone No. (703) 308-1938

Form PCT/ISA/210 (second sheet)(July 1992)*